

StitchWorld

Technology and Management in Sewn Product Industry



22

Reflexive Production System: Use of Kanban

Setting up a Supermarket between Cutting Room and Sewing Floor

14

Are we neglecting technology?
Experts speak...

26

"We are already in the future"
– Flavio Cattini, Founder & MD,
FK Group

28

Garment Technology
Expo 2016: Unfurling new
and vivid directions

4650 EV9 @URI

AUTOMATIC LOOP SETTING UNIT



THE BEST IS OUR STANDARD!


New presser foot

New 400 W motors

Completely new electronic

New loop cutting & suction device

7" coloured touch screen panel

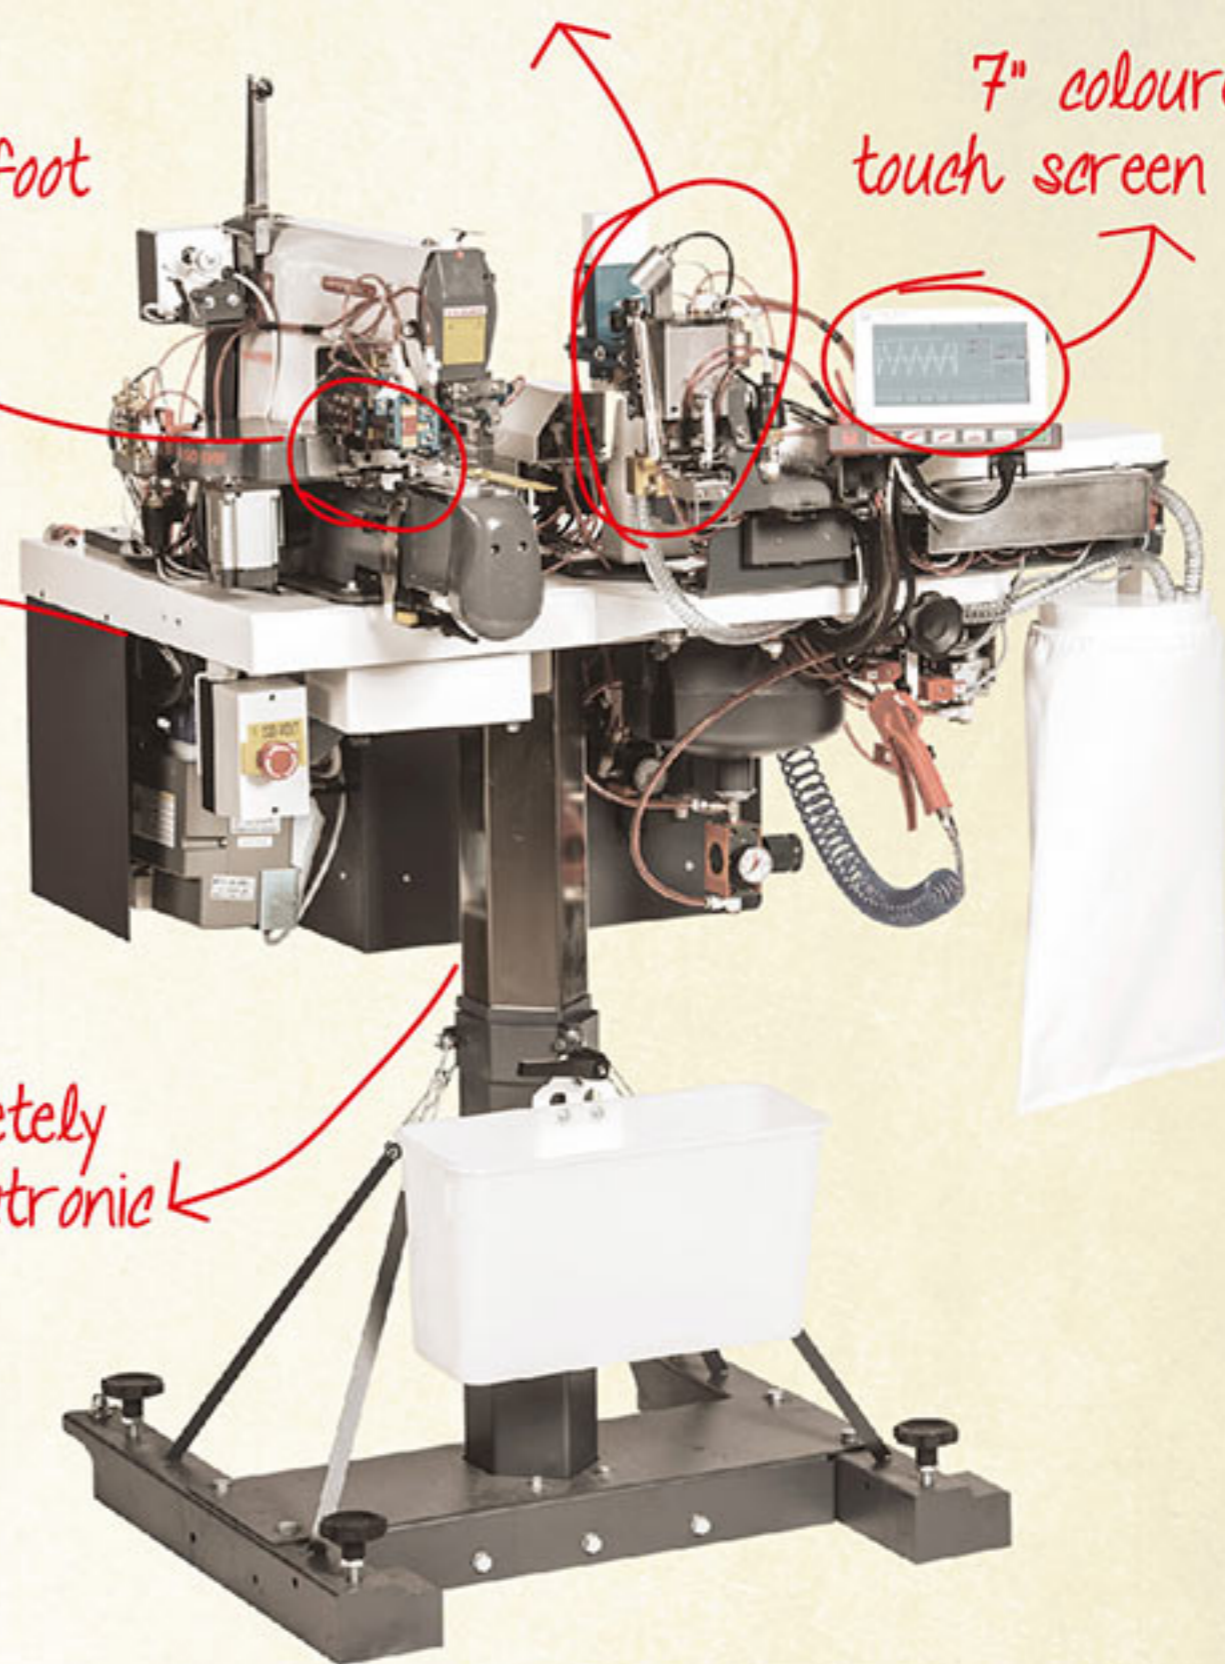

Fully customized bartack to meet every fashion requirement



SPECIFICATIONS

- ✓ Max Speed: 2.800 rpm
- ✓ No. of stitches: 1 to 999
- ✓ Needle gauge: 20 to 80 mm
- ✓ Loop width: 8 to 25 mm
- ✓ Finished Loop: 32 to 85 mm
- ✓ Sewing Area: 15 x 28 mm
- ✓ New suction device
- ✓ New electronic bobbin winder
- ✓ New loop aligner developed for 3D loop

UPGRADED FEATURES

- ✓ Double compensatory presser foot
- ✓ New top efficiency thread blowing device
- ✓ Upgrade of loop cutting device

NEXT EVENTS:

JIAM
2016 OSAKA

6-9/04/2016, Osaka, Japan
booth **4-221**

texprocess
AMERICAS

3-5/05/2016, Atlanta, USA
booth **1726**



follow us!!



For info: www.vbmgroup.it, sales@vbm-grp.com or contact vbm local branches @ the addresses:
sales@vbm-in.com (INDIA) | sales@vbm-bd.com (BANGLADESH) | sales@vbm-ae.com (U.A.E.) |
sales@vbm-eg.com (EGYPT) | sales@vbm-mx.com (MEXICO)

VI.BE.MAC. Spa: 37057 S. Giovanni Lupatoto (VR) Italy ph. +39 045 8778151/52 - fax +39 045 8779024
www.vibemac.com